


# Shaft Collars

- 2 Counterbored Holes/3 Counterbored Holes
- 1 Hole
- Slit Type



## 2 Counterbored Holes / 3 Counterbored Holes


Code	Type	Material		Surface Treatment	Accessories
		GB	Equiv.		
FAF41	2 Counterbored Holes	45	S45C	Black Oxide	Hex Socket Head Cap Screw 1 pc.
FAF42		0Cr18Ni9	SUS304	Fine Sandblasting Electroless Nickeling	Hex Socket Head Cap Screw 1 pc. (Stainless Steel)
FAF46	3 Counterbored Holes	45	S45C	Black Oxide	Hex Socket Head Cap Screw 1 pc.
FAF71		0Cr18Ni9	SUS304	Fine Sandblasting Electroless Nickeling	Hex Socket Head Cap Screw 1 pc. (Stainless Steel)
FAF72					
FAF76					

① If there is requirement of rust prevention, please choose stainless steel materials or electroless nickel-plated products firstly.  
 ② Due to the different production batches of products, nickel plated products may have fine sand blasting, which does not affect the size and function.

① Due to different production batches, the fine sandblasted electroless nickle-plated products may not be sandblasted when shipped, which does not affect the size and function.  
 ② Due to production process reasons, there will be a threaded fastening hole at the end of the threaded hole of the stainless steel fixing collar body, which does not affect the size and function.

### 2 Counterbored Holes FAF41/42/46

### 3 Counterbored Holes FAF71/72/76

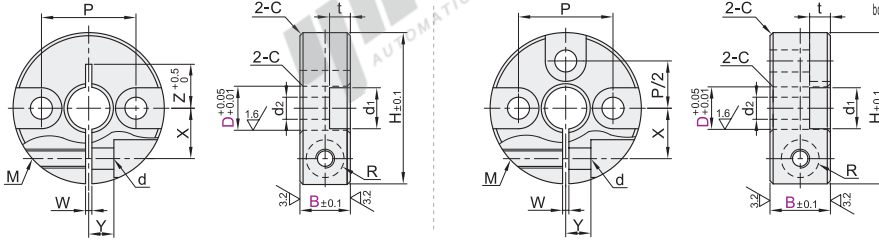

The first perspective

Part Number		B	H	M	d	R	W	X	Y	Z	P	d <sub>2</sub>	d <sub>1</sub>	t	C	
Code	D															
2 Counterbored Holes FAF41 FAF42 FAF46	6	8	24	M3	3.4	3	1	8	4	6~8	15	3.5	6.5	3.3	1	
		10		M4	4.5	3.75				7~8	17					
	8	8	25	M3	3.4	3			9		8~9	18	4.5	8	4.4	
		10	28	M4	4.5	3.75			10	5	10~11	22	5.5	9.5	5.4	
	10	12	33	M5	5.5	4.5			11		10~12	24	5.5	9.5	5.4	
		15	36	M6	6.6	6			13	6	11~12	23	6.6	11	6.5	
		10	35	M4	4.5	3.75			11	5	10~12	24	5.5	9.5	5.4	
		12	35	M5	5.5	4.5			11	5	10~12	24	5.5	9.5	5.4	
	3 Counterbored Holes FAF71 FAF72 FAF76	13	12	36	M5	5.5	4.5		11	5	10~11	23	4.5	8	4.4	
			15	36	M6	6.6	6		12	6	11~13	25	5.5	9.5	5.4	0.6
15		12	38	M5	5.5	4.5	1.5		13	8	11~13	27				
		15	40	M6	6.6	6			13	8	11~12	28	6.6	11	6.5	
16		10	36	M5	5.5	4.5			12	6	11~12	26	4.5	8	6.4	
		12	38	M5	5.5	4.5			13	6	12~13	28	5.5	9.5	6.4	
20		15	42	M6	6.6	6			13	8	13~14	29	6.6	11	6.5	
		12	42	M5	5.5	4.5			15	7	13~14	32	5.5	9.5	6.4	
25		15	45	M6	6.6	6			16	8	14~15	33	6.6	11	6.5	
		20	45	M6	6.6	6			16	8	14~15	33	6.6	11	6.5	
	12	48	M5	5.5	4.5			17	7	14~16	37	5.5	9.5	5.4		
	15	50	M6	6.6	6			18	10	15~17	38	6.6	11	6.5		
30	55	M6	6.6	6			20	10	20	43	6.6	11	6.5	1		



Part Number			B
Code	D		
FAF41		8	
FAF42	6	10	
FAF42-D6-B8			



Discount price		
Per	1~10	11~
Price	100%	Additional quotation




Delivery	
Per	6
Price	100%

## 1 Hole

Code	Type	Material		Surface Treatment	Accessories
		GB	Equiv.		
FAJ21	Slit Type 1 Hole	0Cr18Ni9	SUS304	—	Hex Socket Head Cap Screw 1 pc. (Stainless Steel)

- ① Features
- Strong clamping force.
  - Can install sensors and micro switches on the shaft collar.

② Due to different production batches, the fine sandblasted electroless nickle-plated products may not be sandblasted when shipped, which does not affect the size and function.

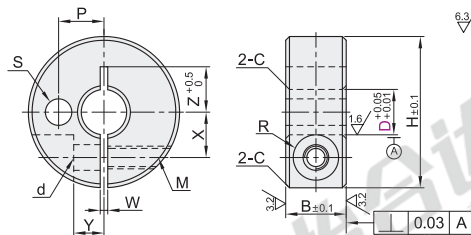

The first perspective



Part Number		B	H	M	d	R	W	X	Y	Z	S	P	C
Code	D												
FAJ21	10	12	40	M4	4.5	3.75		10	9.5	14	6.5	14.5	
	12							11					
	14							12.5					
	15		45						10	16		16.5	
	16				M5	5.5	4.5				9		
	18							1.5					0.6
	20		50						17	8	19		18.5
	22								22	9.5	21		23.5
	24		65						23	8.5		13	27
	25				M6	6.6	6		26		24		27
	30		75						29	12			30
	32		80						30	13			30
	35							2					1



Part Number			B
Code	D		
FAJ21	10	12	
FAJ21	12	13	
FAJ21-D14			



Discount price		
Per	1~10	11~
Price	100%	Additional quotation



Delivery	
Per	6
Price	100%