



Code	Type		Material	Surface Treatment
			①	① ③
LEB11	Standard Type	Support Side	S45C	Black Oxide

○ Constituting Parts

No.	Part Name	Qty.
①	Bearing Housing	1
②	Radial bearing with grade 6	1
③	Retaining Ring C Type	1




- ❗ Bearing is filled with low dust generation grease.
- ❗ Bearing is Double Shielded.
- ❗ Using JIS grade 6 radial bearing is ideal for high-precision, high-speed rotation applications.

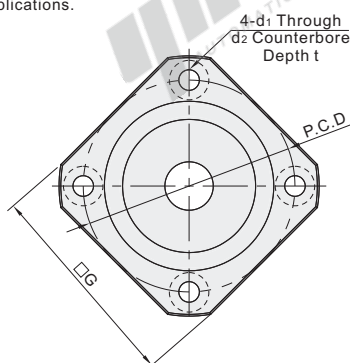

 Advise Shaft End Machining Dimensions

Installation Method A

Installation Method B



The first perspective

Part Number		Ød	T	H	F	ØD _{g6}	R	P.C.D	G	Ød ₁	Ød ₂	t	Advise Shaft end Machining Dimensions						Retaining Ring C Type		
Code	No.												Ball Screws Shaft Dia.		Shaft end O.D.		Size of retaining ring groove				
													ØD	Ød	ØA	E	V	Y			
LEB11	6	6	10	6	4	22 ^{-0.007 -0.020}	36	28	28	3.4	6.5	4	8	6 ^{-0.005 -0.012}	5.7	9	6.8	0.8	TBP01-6		
	10	8	12	7	5	28 ^{-0.007 -0.020}	43	35	35				12/14/15	8 ^{-0.005 -0.012}	7.6	10	7.9	0.9	TBP01-8		
	12	10	15		8	34 ^{-0.007 -0.025}	52	42	42	4.5	8	14/15/16	10 ^{-0.005 -0.012}	9.6	11	9.15	1.15	TBP01-10			
	15	15	17	9		40 ^{-0.007 -0.025}	63	50	52	5.5	9.5	5.5	18/20	15 ^{-0.005 -0.014}	14.3	13		10.15	TBP01-15		
	20	20	20	11	9	57 ^{-0.010 -0.029}	85	70	68	6.6	11	6.5	25/28/30	20 ^{-0.005 -0.014}	19	19	15.35	1.35	TBP01-20		
	25	25	24	14	10	63 ^{-0.010 -0.029}	98	80	79	9	14	8.5	30/32/36	25 ^{-0.005 -0.014}	23.9	20	16.35		TBP01-25		
	30	30	27	18	9	75 ^{-0.010 -0.029}	117	95	93	11	17.5	11	36/40	30 ^{-0.005 -0.015}	28.6	21	17.75	1.75	TBP01-30		

Please order
as shown

Part Number		Ød
Code	No.	
EB11	6	6
	10	8

LEB11 — 6



- Discount price

Per	1~9	10~
Price	100%	Additional quotation



Delivery

2