


Standard/with Wrench Flats

Both Ends Threaded, Thread Length Configurable


Circular Posts

Standard

Code	Type	Standard	Material		Surface Treatment
			GB	Equiv.	
RAH43	Thread Length	Standard	Q235	SS400	Electroless Nickel Plating
RAH46	Configurable		0Cr18Ni9	SUS304	

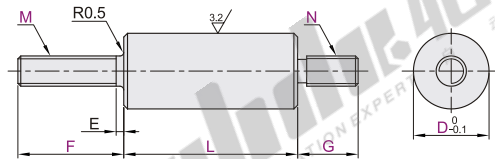

L	Tolerance
15~300	±0.2
300.5~600	±0.3
600.5~1020	±0.4



① Anti-rust Oil is applied on Q235 or Equivalent products.

② For optional processing, please see the following chart.

The first perspective

Part Number		0.5 mm Inc.				M		N		E
Code	D	L	F	G						
RAH43 RAH46	5	15.0~60.0	5.0~25.0	5.0~25.0	2.6 3		2.6 3			1.0
	6		5.0~30.0	5.0~30.0	3 4		3 4			
	8	20.0~160.0	8.0~40.0	8.0~40.0	4 5		4 5			1.6
	10	20.0~360.0	8.0~45.0	8.0~45.0	4 5 6		4 5 6			2.0
	12	25.0~420.0	10.0~55.0	10.0~55.0	5 6 8		5 6 8			2.5
	15	30.0~520.0	12.0~60.0	12.0~60.0	6 8 10		6 8 10			3.0
	20	40.0~520.0	15.0~75.0	15.0~75.0	6 8 10 12		6 8 10 12			3.5
	25	55.0~620.0	20.0~80.0	20.0~80.0	6 8 10 12 16		6 8 10 12 16			4.0
	30	65.0~720.0	25.0~90.0	25.0~90.0	6 8 10 12 16 20		6 8 10 12 16 20			5.0
	35	80.0~820.0	30.0~100.0	30.0~100.0	8 10 12 16 20 24		8 10 12 16 20 24			
	40	80.0~920.0	35.0~110.0	35.0~110.0	10 12 16 20 24		10 12 16 20 24			6.0
	50	80.0~1020.0	40.0~120.0	40.0~120.0	12 16 20 24		12 16 20 24			

③ Optional processing details are listed below.

Optional Processing



Part Number		0.5 mm Inc.				M	N	Optional Processing Code
Code	D	L	F	G				
RAH43	5	15~60	5~25	5~25	2.6 3		2.6 3	AC
RAH46	6		5~30	5~30	3 4		3 4	LD()

RAH46—D5—L50—F20—G20—M3—N3

Part Number		0.5 mm Inc.				M	N	Optional Processing Code
Code	D	L	F	G				
RAH43	5	15~60	5~25	5~25	2.6 3		2.6 3	AC
RAH46	6		5~30	5~30	3 4		3 4	LD()

RAH46—D5—L50—F20—G20—M3—N3—AC




Discount price	
Per	1~4 5~
Price	100% Additional quotation



Delivery	
	6

with Wrench Flats

Code	Type	Standard	Material		Surface Treatment
			GB	Equiv.	
RAH53	Thread Length	with Wrench Flats	Q235	SS400	Electroless Nickel Plating
RAH56	Configurable		0Cr18Ni9	SUS304	

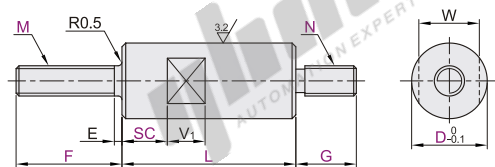

L	Tolerance
15~300	±0.2
300.5~600	±0.3
600.5~1020	±0.4



① Anti-rust Oil is applied on Q235 or Equivalent products.

The first perspective

Part Number		0.5 mm Inc.				M		N		W	V1	E
Code	D	L	F	G	SC							
RAH53 RAH56	5	15.0~60.0	5.0~25.0	5.0~25.0	0~50.0	2.6 3		2.6 3		4		1.0
	6		5.0~30.0	5.0~30.0		3 4		3 4		5		
	8	20.0~160.0	8.0~40.0	8.0~40.0	0~150.0	4 5		4 5		7	10	1.6
	10	20.0~360.0	8.0~45.0	8.0~45.0	0~350.0	4 5 6		4 5 6		8		2.0
	12	25.0~420.0	10.0~55.0	10.0~55.0	0~408.0	5 6 8		5 6 8		10		2.5
	15	30.0~520.0	12.0~60.0	12.0~60.0		6 8 10		6 8 10		13	12	3.0
	20	40.0~520.0	15.0~75.0	15.0~75.0	0~508.0	6 8 10 12		6 8 10 12		17		3.5
	25	55.0~620.0	20.0~80.0	20.0~80.0	0~610.0	6 8 10 12 16		6 8 10 12 16		22		4.0
	30	65.0~720.0	25.0~90.0	25.0~90.0	0~705.0	6 8 10 12 16 20		6 8 10 12 16 20		27		5.0
	35	80.0~820.0	30.0~100.0	30.0~100.0	0~805.0	8 10 12 16 20 24		8 10 12 16 20 24		30	16	
	40	80.0~920.0	35.0~110.0	35.0~110.0	0~900.0	10 12 16 20 24		10 12 16 20 24		36		6.0
	50	80.0~1020.0	40.0~120.0	40.0~120.0	0~1000.0	12 16 20 24		12 16 20 24		41	20	



Part Number		0.5 mm Inc.				M	N	W
Code	D	L	F	G	SC			
RAH53	5	15~60	5~25	5~25	0~50	2.6 3	2.6 3	4
RAH56	6		5~30	5~30		3 4	3 4	5

RAH56—D5—L50—F20—G20—SC20—M3—N3


Optional Processing

Part Number		0.5 mm Inc.				M	N	Optional Processing Code
Code	D	L	F	G	SC			
RAH53	5	15~60	5~25	5~25	0~50	2.6 3	2.6 3	AC
RAH56	6		5~30	5~30		3 4	3 4	LD()


RAH56—D5—L50—F20—G20—SC20—M3—N3—AC



Code	Spec.
AC	Undercut Ordering Code AC Adds a relief to Dimension A.



Code	Spec.
LD()	Through Hole for Hexagonal Wrench Ordering Code LD35 D d Hex Wrench Width ① 1mm Inc. ② d/2+5≤LD≤(d/2+5) ③ Applicable to D=8~30 only.



D	d	Hex Wrench Width
8	2.5	2
10	3	2.5
12	3.5	3
15	4.6	4
20	5.8	5
25	6.9	6
30	9.2	8