

Circular Posts



Standard/with Wrench Flats

Pilot, Both Ends Threaded

Standard

Code	Type	Material	Surface Treatment
RAJ43	Pilot Both Ends Threaded Standard	GB Q235	Electroless Nickel Plating
RAJ46		0Cr18Ni9 SUS304	

L	Tolerance
20~300	±0.2
300.5~600	±0.3
601~720	±0.4

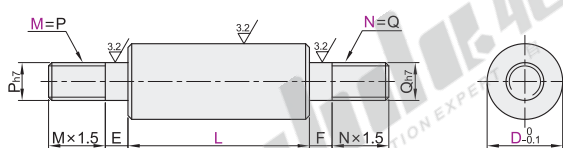

Anti-rust Oil is applied on Q235 or Equivalent products.

Part Number		1 mm Inc.		M-N	E	F
Code	D	L				
RAJ43 RAJ46	8	20~160		3 4 5	4	4
	10	20~360		4 5 6	5	5
	12	25~420		5 6 8	6	6
	15	30~520		6 8 10	8	8
	20	40~520		6 8 10 12	10	10
	25	60~620		6 8 10 12 16	12	12
	30	60~720		6 8 10 12 16 20	16	16



Part Number	1 mm Inc.	M-N	E
Code D L			
RAJ43 8 20~160	3 4 5	4	
RAJ46 10 20~360	4 5 6	5	

Optional Processing

Part Number	1 mm Inc.	M-N	Optional Processing Code
Code D L			
RAJ43 8 20~160	3 4 5		LC(LD)
RAJ46 10 20~360	4 5 6		MC(NC)



Discount price
Per 1~4 5~
Price 100% Additional quotation





Delivery
6

with Wrench Flats

Code	Type	Material	Surface Treatment
RAJ53	Pilot Both Ends Threaded with Wrench Flats	GB Q235	Electroless Nickel Plating
RAJ56		0Cr18Ni9 SUS304	

L	Tolerance
20~300	±0.2
300.5~600	±0.3
601~720	±0.4

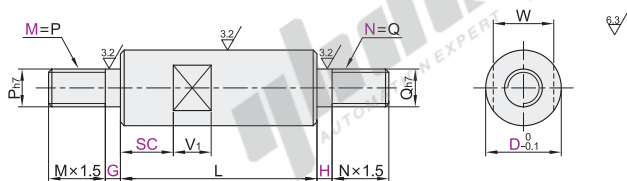

Anti-rust Oil is applied on Q235 or Equivalent products.

Part Number		1 mm Inc.		M-N	1 mm Inc.		W	V1
Code	D	L	SC		G	H		
RAJ53 RAJ56	8	20~160	0~150	3 4 5	2~4	2~4	7	10
	10	20~360	0~350	4 5 6	2~5	2~5	8	
	12	25~420	0~408	5 6 8	2~6	2~6	10	
	15	30~520	0~508	6 8 10	2~8	2~8	13	
	20	40~520		6 8 10 12	2~10	2~10	17	12
	25	60~620	0~610	6 8 10 12 16	2~12	2~12	22	
	30	60~720	0~705	6 8 10 12 16 20	2~16	2~16	27	16



Part Number	1 mm Inc.	M-N	1 mm Inc.	W
Code D L SC				
RAJ53 8 20~160 0~150	3 4 5		2~4	7
RAJ56 10 20~360 0~350	4 5 6		2~5	8

Optional Processing


Part Number	1 mm Inc.	M-N	1 mm Inc.	Optional Processing Code
Code D L SC				
RAJ53 8 20~160 0~150	3 4 5		2~4	LC
RAJ56 10 20~360 0~350	4 5 6		2~5	MC(NC)



Discount price
Per 1~4 5~
Price 100% Additional quotation



Code	Spec.
LC	Changes the L Dimension Tolerance [Ordering Code] LC When L20~300, L±0.05; When L300.5~720, L±0.10
	Changes The Threaded Length [Ordering Code] MC10 Changes the thread length of M and N threads. 0.1mm Inc. Mx1≤MC<Mx1.5 Nx1≤NC<Nx1.5

Code	Spec.																								
LD ()	Through Hole for Hexagonal Wrench	Ordering Code LD35 1mm Inc. $d/2+5 \leq L \leq L-(d/2+5)$ Only applicable to RAJ43/46.																							
		<table><tr><th>D</th><th>d</th><th>Hex Wrench Width</th></tr><tr><td>8</td><td>2.5</td><td>2</td></tr><tr><td>10</td><td>3</td><td>2.5</td></tr><tr><td>12</td><td>3.5</td><td>3</td></tr><tr><td>15</td><td>4.6</td><td>4</td></tr><tr><td>20</td><td>5.8</td><td>5</td></tr><tr><td>25</td><td>6.9</td><td>6</td></tr><tr><td>30</td><td>9.2</td><td>8</td></tr></table>	D	d	Hex Wrench Width	8	2.5	2	10	3	2.5	12	3.5	3	15	4.6	4	20	5.8	5	25	6.9	6	30	9.2
D	d	Hex Wrench Width																							
8	2.5	2																							
10	3	2.5																							
12	3.5	3																							
15	4.6	4																							
20	5.8	5																							
25	6.9	6																							
30	9.2	8																							