



# Hexagonal Posts

◀ L Configurable/L Dimension, Thread Dia. Configurable  
One End Threaded, One End Tapped

## □ L Configurable

Code	Type	L Configurable	Material		Surface Treatment
			GB	Equiv.	
RBE02	One End Threaded, One End Tapped	L Configurable	Q235	SS400	Electroless Nickel Plating
RBE06			0Cr18Ni9	SUS304	

L	Tolerance
8~300	±0.2
300.5~620	±0.3
620.5~1020	±0.4

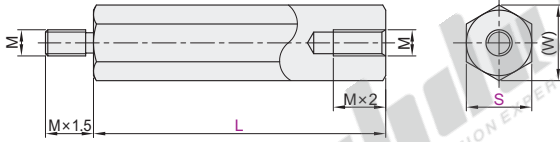

Ⓜ Anti-rust Oil is applied on Q235 or Equivalent products.

Code	Part Number	0.5 mm Inc.		M	(W)
		S	L		
RBE02	5	8.0~60.0	2.6	5.8	
	6	15.0~60.0	3	6.9	
	7	20.0~160.0	4	8.1	
	8	20.0~260.0	5	9.2	
	10	25.0~360.0	6	11.5	
	12	25.0~420.0	8	13.9	
	13	30.0~420.0	10	15.0	
	14	30.0~520.0	12	16.2	
	17	35.0~520.0	16	19.6	
	19	45.0~520.0	20	21.9	
	24	55.0~620.0	24	27.7	
	RBE06	27	65.0~820.0	20	31.2
	30	65.0~1020.0	20	34.6	
	32	80.0~1020.0	24	36.9	



Please order as shown

Part Number	S	L
RBE02	6	15~60
RBE06	7	20~160

RBE06 - S6 - L25

## □ Optional Processing

Part Number	S	L	Optional Processing Code
RBE02	6	15~60	LC MC8
RBE06	7	20~160	LC MC8

RBE06 - S6 - L25 - MC4



Discount price	Per	1~4	5~
Price	100%	Additional quotation	





Delivery	10
----------	----

## □ L Dimension, Thread Dia. Configurable

Code	Type	L Dimension, Thread Dia. Configurable	Material		Surface Treatment
			GB	Equiv.	
RBE12	One End Threaded, One End Tapped	L Dimension, Thread Dia. Configurable	Q235	SS400	Electroless Nickel Plating
RBE16			0Cr18Ni9	SUS304	

L	Tolerance
8~300	±0.2
300.5~620	±0.3
620.5~1020	±0.4

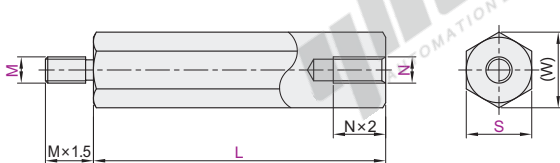

Ⓜ Anti-rust Oil is applied on Q235 or Equivalent products.

Code	Part Number	0.5 mm Inc.		M-N	(W)
		S	L		
RBE12	5	8.0~60.0	2 2.6	5.8	
	6	15.0~60.0	3 4	6.9	
	7	20.0~160.0	3 4	8.1	
	8	20.0~260.0	3 4 5	9.2	
	10	25.0~360.0	4 5 6	11.5	
	12	30.0~420.0	4 5 6 8	13.9	
	13	35.0~420.0	4 5 6 8	15.0	
	14	35.0~520.0	4 5 6 8 10	16.2	
	17	35.0~520.0	5 6 8 10	19.6	
	19	45.0~520.0	5 6 8 10 12	21.9	
	24	55.0~620.0	6 8 10 12 16	27.7	
	RBE16	27	65.0~820.0	5 6 8 10 12 16 20 24	31.2
	30	80.0~1020.0	5 6 8 10 12 16 20 24	34.6	
	32	80.0~1020.0	5 6 8 10 12 16 20 24	36.9	



Please order as shown

Part Number	S	L	M-N
RBE12	6	15~60	3 4
RBE16	7	20~160	3 4

RBE16 - S6 - L25 - M4 - N4

## □ Optional Processing

Part Number	S	L	M-N	Optional Processing Code
RBE12	6	15~60	3 4	LC MC8
RBE16	7	20~160	3 4	LC MC8

RBE16 - S6 - L25 - M4 - N4 - MC4



Discount price	Per	1~4	5~
Price	100%	Additional quotation	



Delivery	10
----------	----



Optional Processing

Code	Spec.	Code	Spec.
LC	<p>Changes the L Dimension Tolerance</p> <p>[Ordering Code] LC</p> <p>□ When L8~300, L±0.05; When L300.5~620, L±0.10; When L620.5~1020, L±0.15.</p>	MC ( )	<p>Changes The Thread Length.</p> <p>[Ordering Code] MC8</p> <p>□ 0.1mm Inc. □ Mx1≤MC&lt;Mx1.5</p>