

One-Touch Fitting, In-Line Type ▶ Standard, Square, External Silencer ▶

Vacuum Ejector

One-Touch Fitting, In-Line Type


Code	Type
WEC51	In-Line Type High Vacuum Type
WEC56	In-Line Type Large Flow Type

Specification


Applicable Fluid	Air
Operating Pressure Range(Mpa)	0.7
Rated Supply Pressure(Mpa)	0.45
Operating Temperature Range(°C)	5~60



High Vacuum Type WEC51

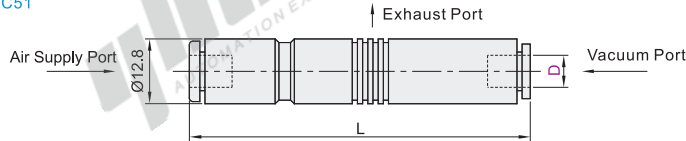

Large Flow Type WEC56

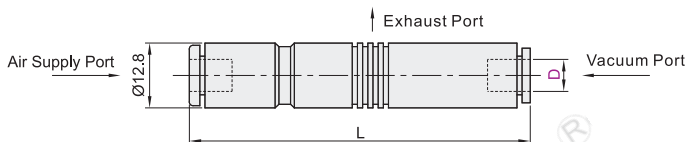

Part Number		Nozzle Dia.	L	Ultimate Vacuum (-kPa)	Ultimate Vacuum Flow (l/min)	Flow Consumption (l/min)	Weight (g)
Code	Tube Size D						
WEC51	6	0.5	59	-85	7	10	6.5
		0.7	66		12	19	7.0
WEC56	6	0.5	59	-48	12	10	6.5
		0.7	66		21	19	7.0



Please order as shown

Part Number		Nozzle Dia.
Code	D	
WEC51	6	0.5
		0.7

WEC51—D6—0.5



Discount price	
Per	1~9
Price	100%





Delivery	
Per	1~9
Price	100%

Standard, Square, External Silencer

Code	Type	Accessories
WED21	Square	Standard External Silencer

Specification

Applicable Fluid	Air
Operating Pressure Range(Mpa)	0.1~1.5(1.0~15kgf/cm ²)
Operating Temperature Range(°C)	0~60
Lubrication	Not Required

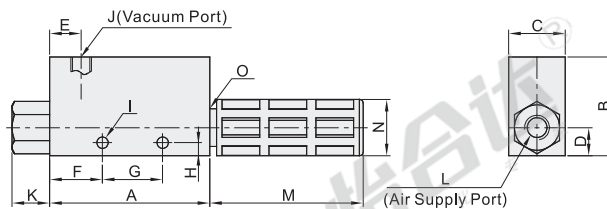

Part Number		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	Nozzle Dia.	Vacuum -kPa(-mmHG)	Flow Consumption L/min	Air Displacement L/min
Code	No.																			
WED21	5	45	33	16	10	8	14	20	4.5	4.2	G1/8	10	G1/8	30	16	G1/8	0.5	86.7	13	6
	10	63	35	20	11	10	20	25	5	4.5	G1/4	15	G1/4	55	20	G1/4	1.0		44	27
	15	85	40	30	15	13	28	32	7	6	G3/8	20	G1/4	80	30	G1/2	1.5	91.8(690)	100	63
	20																2.0		180	110



Please order as shown

Part Number		A
Code	No.	
WED21	5	45
	10	

WED21—5



Discount price	
Per	1~9
Price	100%



Delivery	
Per	1~9
Price	100%