

Economy All Stainless Steel Couplings



- ◀ Tapped, 90° Elbow/Union Tees
- ◀ Threaded, Straight/ 90° Elbow
- ◀ Threaded, Equal Diameter

☑ Tapped, 90° Elbow

Code	Type	Material	
		GB	Equiv.
XZP11	Tapped 90° Elbow	0Cr18Ni9	SUS304

☑ Specifications

Max. Operating Pressure (MPa)	3
Applicable Fluid	Pulsating Water/Still Water/ Air/Steam/Gas/Oil



Part Number		R	B	G	H
Code	Nominal				
XZP11	02	Rc1/4	19	18	27
	03	Rc3/8	22.5	21	33
	04	Rc1/2	26.5	26.5	40



Please order as shown

☑ Tapped, Elbows

Part Number	Code	Nominal	R
XZP11-02	02	Rc1/4	
	03	Rc3/8	




Discount price	Per	1~29	30~
Price	100%		Additional quotation

☑ Tapped, Union Tees

Code	Type	Material	
		GB	Equiv.
XZP16	Tapped Union Tees	0Cr18Ni9	SUS304

☑ Specifications

Max. Operating Pressure (MPa)	3
Applicable Fluid	Pulsating Water/Still Water/ Air/Steam/Gas/Oil





Part Number		R	B	G	H
Code	Nominal				
XZP16	02	Rc1/4	18.5	18	28
	03	Rc3/8	22.5	21	33
	04	Rc1/2	26.5	26.5	40



Delivery 8

☑ Threaded, Straight

Code	Type	Material	
		GB	Equiv.
XZP01	Threaded Straight	0Cr18Ni9	SUS304

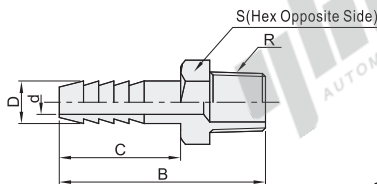

Part Number		Nominal	R	B	D	C	d	S
Code	Applicable Tube I.D.							
XZP01	6	01	R1/8	36	7	20	3.6	12
		02	R1/4	42		24	4	14
	9	03	R3/8	47.5	10	25	6.2	18
		03		48.5		28	7.6	
	12	04	R1/2	56	12	32	8	22

☑ Threaded, Straight

Part Number	Code	Applicable Tube I.D.	Nominal	R
XZP01-6-02	01	R1/8		
	02	R1/4		

Please order as shown

☑ Threaded, 90° Elbow

Part Number	Code	Nominal	R
XZP06-02	02	R1/4	
	03	R3/8	

XZP06-02



Discount price	Per	1~29	30~
Price	100%		Additional quotation




Delivery 6

☑ Threaded, 90° Elbow

Code	Type	Material	
		GB	Equiv.
XZP06	Threaded 90° Elbow	0Cr18Ni9	SUS304

☑ Specifications

Max. Operating Pressure (MPa)	3
Applicable Fluid	Pulsating Water/Still Water/ Air/Steam/Gas/Oil





Part Number		R	A	B
Code	Nominal			
XZP06	02	R1/4	12	25.5
	03	R3/8	12	28
	04	R1/2	13	30

☑ Threaded, Equal Diameter

Code	Type	Material	
		GB	Equiv.
XZQ51	Threaded, Equal Dia., Straight	0Cr18Ni9	SUS304

☑ Specifications

Max. Operating Pressure (MPa)	3
Applicable Fluid	Pulsating Water/Still Water/ Air/Steam/Gas/Oil



型号		R	A	B	D	S
代码	公称型号					
XZQ51	01	R1/8	10.5	27.5	5.5	12
	02	R1/4	13	32.5	8	15
	03	R3/8	14	35	11.5	18
	04	R1/2	16	40	15.4	22



Please order as shown

Part Number	Code	Nominal	R
XZQ51-01	01	R1/8	
	02	R1/4	



Discount price	Per	1~29	30~
Price	100%		Additional quotation



Delivery 8