


Locating Pins

Hex Socket Large Head Tapered, With Threaded Shank


Code	Type	Material		Hardness	Surface Treatment
		GB	Equiv.		
YCC06	Round	0Cr18Ni9	SUS304	—	—
YCC26	Diamond				



Round
YCC06

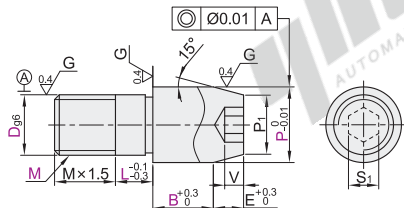

Diamond
YCC26

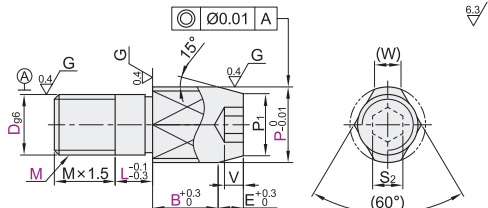

$$P_1 = P - E \cdot \tan 15^\circ 2$$

The first perspective

Round

Part Number		0.01 mm Inc.		1 mm Inc.	0.1 mm Inc.	M	E	S ₁	V
Code	D _{g6}	P	L	B					
YCC06	3	-0.002 -0.008	6.00~6.50	2~8	3.5~10.0	3	2		
	4	-0.004 -0.012	6.50~7.00	2~10	2.5~10.0	3 4			
	5		6.50~8.00			3 4 5	3	3	2
	6		6.50~10.00	3~12	2.5~12.0	4 5 6			
	8	-0.005 -0.014	9.00~13.00	5~12	3.0~15.0	4 5 6 8		4	2.5
	10		11.00~15.00	5~17	4.5~20.0	5 6 8 10	4	5	3
	12	-0.006 -0.017	13.00~18.00	8~17	6.0~20.0	6 8 10 12		6	4
	16		17.00~25.00	8~22	8.0~20.0	8 10 12 16	5	8	5
	20	-0.007 -0.020	22.00~30.00	10~22		10 12 16 20			

Diamond

Part Number		0.01 mm Inc.		1 mm Inc.	0.1 mm Inc.	M	E	(W)	S ₂	V
Code	D _{g6}	P	L	B						
YCC26	6	-0.004 -0.012	8.00~10.00	3~12	2.5~12.0	4 5 6	3	3	3	2
	8	-0.005 -0.014	10.00~13.00	5~12	3.0~15.0	4 5 6 8		3.5	4	2.5
	10		12.00~15.00	5~17	4.5~20.0	5 6 8 10	4	4	5	3
	12	-0.006 -0.017	13.00~18.00	8~17	6.0~20.0	6 8 10 12		5	6	4
	16		17.00~25.00	8~22		8 10 12 16	5	7	8	5
	20	-0.007 -0.020	22.00~30.00	10~22		10 12 16 20		9		



Please order
as shown

Part Number		P	L	B	M
Code	D _{g6}				
YCC06	3	6~6.5	2~8	3.5~10	3
YCC06	4	6.5~7	2~10	2.5~10	3 4

YCC06—D3—P6—L4—B5—M3

Optional Processing

Part Number		P	L	B	M	Optional Processing Code
Code	D _{g6}					
YCC06	3	6~6.5	2~8	3.5~10	3	
YCC06	4	6.5~7	2~10	2.5~10	3 4	MD

YCC06—D4—P7—L4—B10—M3—MD

Discount price

Per	1~9	10~
Price	100%	Additional quotation



Delivery
4



Optional
Processing

Code	Spec.	
MD	Adds a Relief at the Thread End	
		Ordering Code MD Undercut length is approx. Pitch×2.