



Code	Type	Material		Lining Hardness	Operating Temperature	Accessories
		Lining	Cam Followers			
BPY21	Cylindrical Type	Urethane	SUJ2	Shore A90	80°C	Hex Nut
BPY22			SUS440C	Shore A50		
BPY23	Crowned Type		SUJ2	Shore A90		
BPY31			SUS440C	Shore A90		
BPY32						




Cylindrical Type

BPY21/22/23

Hex Socket on Head(d5~10)
(with Seal)

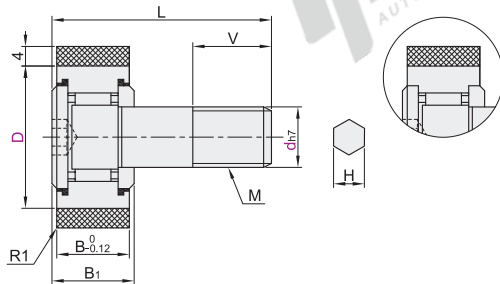


Hex Socket on Head and Shank(d12~16)
(with Seal)

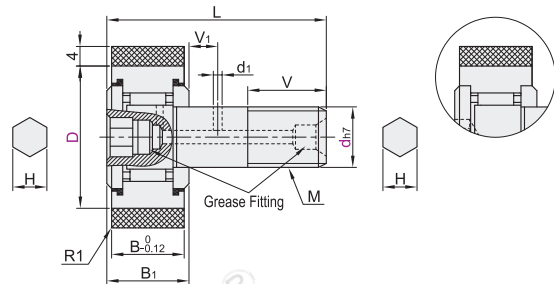


Crowned Type

BPY31/32

Hex Socket on Head(d5~10)
(with Seal)

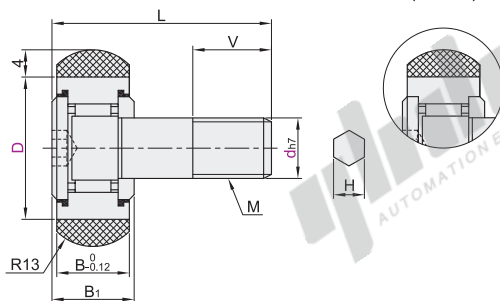

Hex Socket on Head and Shank(d12~16)
(with Seal)

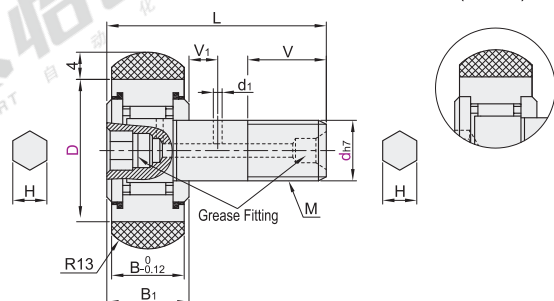

There is no grease replenishing hole for specifications below d10.

The first perspective

Part Number		D	Seal	M	B	B1	L	d1	V	V1	H		Allowable Load (N)	Allowable Speed(rpm)		Weight (g)
Code	dh7										Bearing Steel	Stainless Steel		Shore A90	Shore A50	
Cylindrical Type BPY21	5	13	PP with Seal	M5×0.8	9	10	23	7.5	—	—	3	3	68	1500	250	13
	6	16		M6×1	11	12	28	9	—	—	4	4	90	1300	220	22
	8	19		M8×1.25	11	12	32	—	11	—	4	4	95	1180	190	33
	10	22		M10×1.25	12	13	36	—	13	—	5	5	110	1060	170	50
Crowned Type BPY31 BPY32	12	26	No Seal	M12×1.5	12	13	36	—	13	—	6	6	120	930	150	66
	16	30		M16×1.5	14	15	40	3	14	6	6	6	140	830	140	103
	18	32		M18×1.5	16	17	44	3	16	6	6	6	160	800	130	113
	20	35		M20×1.5	18	19.5	52	3	18	8	8	8	200	740	120	181
Cylindrical Type BPY22 BPY23	5	13	PP with Seal	M5×0.8	9	10	23	7.5	—	—	3	3	68	1500	250	13
	6	16		M6×1	11	12	28	9	—	—	4	4	90	1300	220	22
	8	19		M8×1.25	11	12	32	—	11	—	4	4	95	1180	190	33
	10	22		M10×1.25	12	13	36	—	13	—	5	5	110	1060	170	50
	12	26		M12×1.5	12	13	36	—	13	—	6	6	120	930	150	66
	16	30		M16×1.5	14	15	40	3	14	6	6	6	140	830	140	103



Part Number		Seal
Code	d	
BPY31	5	PP(with Seal)
BPY32	6	— (No Seal)

BPY31— d5 — D13 — PP



Discount price	
Per	1~9
Price	100%



Delivery	
Per	1~9
Price	100%